

Specifications

- **Open-loop stroke: 180 μm @ 150V (fixed-free)**

*Tolerance value: 144~216 μm

- **Operating voltage: -20 V ~ +150 V**

- **Stiffness in motion direction: 0.18 N/ μm**

- **Resonance frequency(fixed-free): 900 Hz**

*Tolerance value: 720~1080 Hz

- **Blocked force: 32 N** (*Tolerance value: 25.6~38.4N)

- **Capacitance: 0.90 μF**


- **Dimension: 28x8x8 mm**

- **Mechanical interface: 2-M2 Tapped hole at both sides**

- **Environment: 0 to 85°C with humidity less than 40%**

- **Mass: 9.0 g**

*All dimensions and specifications stated are nominal.

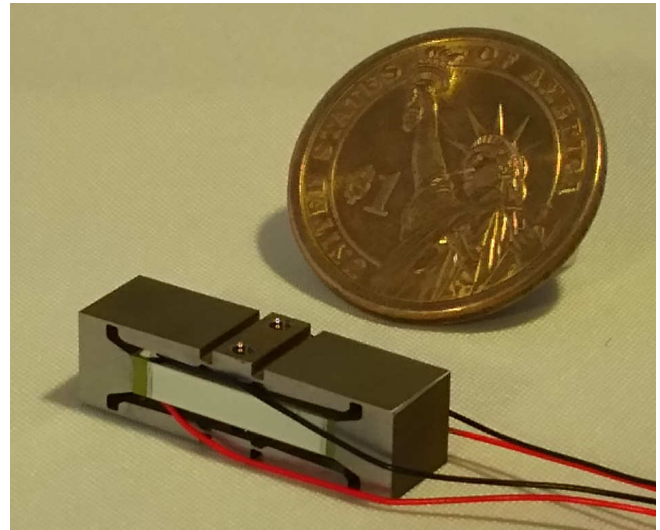

Option:

- Mechanical interface can be tailor with an addition option fees.

Geometry

